


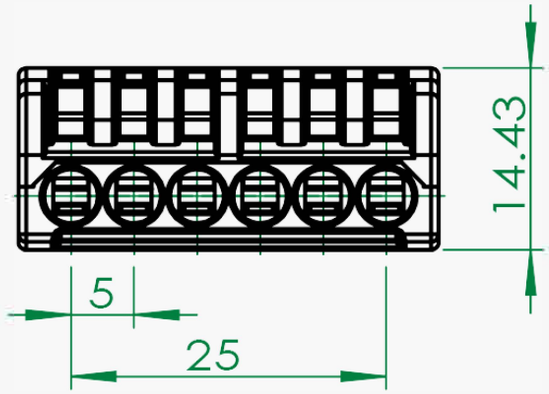

■ SPECIFICATIONS

Applicable wires : 28- 12AWG(0.5-4mm)

Temperature range : -40℃+105℃

Voltage rating : 250V /600V

Current rating : 32A

Contact resistance ≤0.015 Ω

Insulation resistance : ≥1000MΩ


■ Material


Plastic parts :PA66 /PC (N ylon) UL94V 2 (0)

Contact material : B rass Tin/plated

Shrapnel: Stainless steel

■ Error range : ±0.05MM

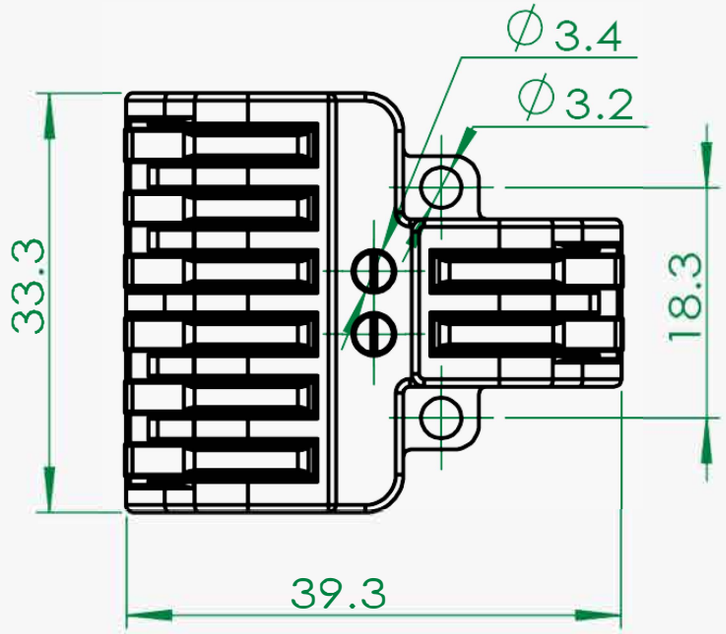

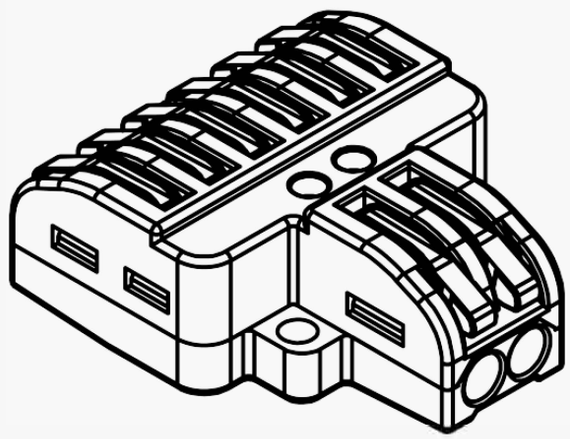

CHIPSEN

NO.				단위 : mm					품명	PCT-2-6
1										
2										
3										