



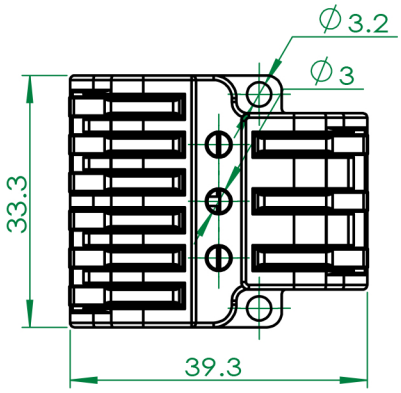

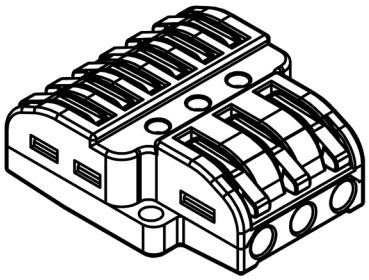

SPECIFICATIONS

- Applicable wires : 28-12AWG(0.5-4mm)
- Temperature range : -40℃+105℃
- Voltage rating : 250V/600V
- Current rating : 32A
- Contact resistance : ≤0.015 Ω
- Insulation resistance : ≥1000MΩ